



ZEUS PRO 50mm LENS




ZEUS PRO 100mm LENS

## THERMAL IMAGING RIFLSCOPE

# ARMASIGHT by FLIR ZEUS PRO® 640

The Armasight by FLIR Zeus PRO thermal weapon sight has simple and intuitive controls, ballistic drop reticles, electronic compass, and digital inclinometer for finer range estimation and target orientation. Solid state technology reticule adjustments and software algorithms, combined with a complementary color reticle platform, ensures maximum reticle contrast, high level target accuracy, and boresight retention.

[www.flir.com](http://www.flir.com)

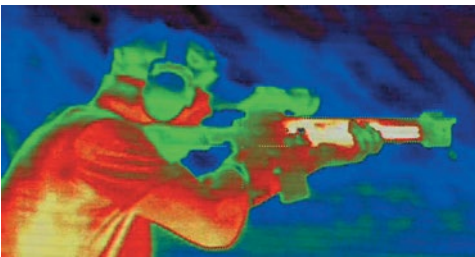

### EXCEPTIONAL VISION

Advanced image processing eliminates the guesswork.

- Completely digital for better detection, classification and recovery, day or night
- Built using the FLIR Tau 2 thermal core
- Bright, high definition AMOLED SVGA displaydisplay for absolute clarity



### COMPACT, POWERFUL

Perfect balance of size and performance.

- Powerful and compact hardware is protected by a robust body
- Featuring a 17  $\mu\text{m}$  pixel pitch and on-chip image processing
- Outstanding thermal image quality in the darkness or through smoke, haze, fog, rain





### SUPERIOR VALUE

Packed with features for a versatile and customizable viewing experience.



- User-adjustable Image Enhancement Tools
- Multiple color palettes
- Digital compass/inclinometer for precise range and target orientation

## SPECIFICATIONS

General	Zeus PRO 640 2-16x50	Zeus PRO 640 4-32x100
Detector type	640 x 512 VOx Microbolometer	
Refresh rate	30 or 60 Hz	
Start up	3 seconds	
Lens system	50 mm; F/1.4	100 mm; F/1.4
Optical magnification	2x	4x
Field of view (H x V)	12.5° x 10°	6.2° x 5°
Digital zoom	2x, 4x, 8x	
Diopter adjustment range	-5 to +5 dpt	
Focusing range	10m to infinity	
Display	AMOLED SVGA 060	
Video output	PAL (768x574 pixels)/ NTSC (640x480 pixels)	
Temperature imaging modes (Image Palettes)	White Hot, Black Hot, Sepia, Fusion, Rainbow, and Rain	
Reticle type	6-Pattern Digitally Controlled: Dot 4 MOA, Line Dot, Cross Center Dot, Cross, Crosshair and "No Reticle"	
Reticle color	Black, White, Red, Cyan	
Boresight adjustment type	Digitally controlled	
<b>User Interface</b>		
Operation switch	On/ Off/ Standby mode	
Control panel buttons	Configures Operational Settings: <ul style="list-style-type: none"> <li>• Display Brightness Control</li> <li>• Image Palette Control</li> <li>• Digital Zoom Control</li> <li>• Reticle Color Control</li> <li>• Reticle Pattern Control</li> <li>• Boresighting Control</li> <li>• On-Screen Menu Navigation</li> </ul>	
Remote control button	Activates/ deactivates the Zeus PRO in standby mode	
Eyepiece focus ring	Adjusts the eyepiece diopter	
<b>Interfacing</b>		
Connector	Power in, analog video in/out, digital video recorder	
<b>Power</b>		
Battery type	Four CR123A 3V Lithium batteries or four AA 1.5V	
Battery life (Operating)	Up to 7 hr (optional up to 14 hrs) at 20°C	
<b>Environmental</b>		
Operating temperature range	-20°C to +50°C (-4°F to +122°F)	
Storage temperature range	-40°C to +60°C (-40°F to +140°F)	
<b>Physical</b>		
Weight	0.95 kg (2.0 lbs)	1.3 kg (2.9 lbs)
Overall dimensions	266 x 76 x 76 mm (10.5 x 3.0 x 3.0 in)	334 x 90 x 100 mm (13.1 x 3.5 x 3.9 in)
Dimensions without lens cap and eyecup	197 x 76 x 76 mm (7.8 x 3.0 x 3.0 in)	265 x 90 x 100 mm (10.4 x 3.5 x 3.9 in)
<b>Package Includes</b>		
Thermal Rifle Scope, Battery Cartridge for AA Batteries, Battery Box Extender Ring, Video Cable, Wireless Remote Control with Picatinny Adapter, Quick Start Guide, Hard Shipping/Storage Case, Lens Cloth		
<b>Optional Accessories</b>		
ATVR000002 – Wireless Head Mounted Display		
IATAM000005 – HD DVR - High-Definition Digital Recorder		
ATAM000008 – Extended Battery Pack - Extended Battery Pack with Rechargeable Batteries		

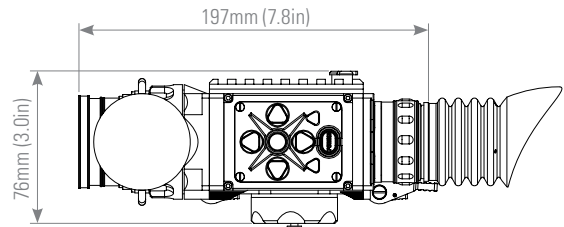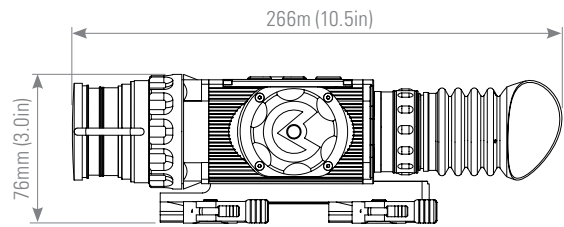

Zeus PRO 50mm Lens

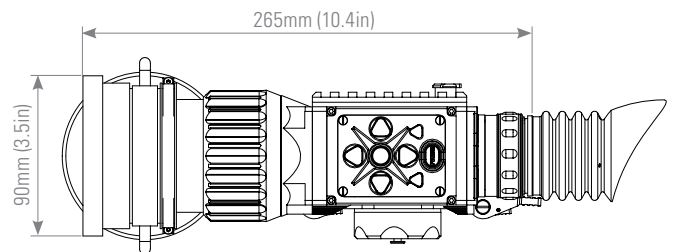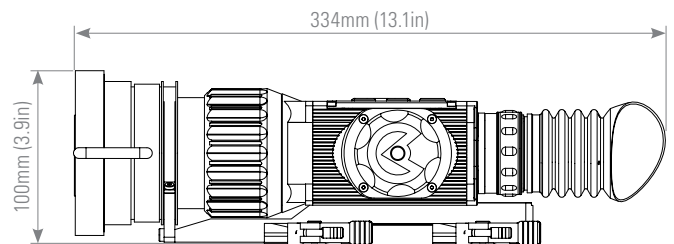

Zeus PRO 100mm Lens

Specifications are subject to change without notice.  
For the most up-to-date specs, go to [www.flir.com](http://www.flir.com)

### FLIR OUTDOOR & TACTICAL SYSTEMS

815 Dubuque Avenue,  
South San Francisco,  
CA 94080

Phone: 1-888-959-2259  
or (650) 492-7755  
Fax: 1-888-959-2260

International Phone/Fax:  
(650) 492-7755

### US Commercial Sales

OTS-Sales@flir.com

### Government Sales

OTS-Gov@flir.com

### International Sales and Export

OTS-Export@flir.com

### Technical Support, Repairs, Returns, Refunds & Warranty

OTS-Support@flir.com

[www.flir.com/ots](http://www.flir.com/ots)  
NASDAQ: FLIR

Equipment described herein is subject to US export regulations and may require a license prior to export. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2018 FLIR Systems, Inc. All rights reserved. x/x/18

x-x-OTS



The World's Sixth Sense™